

FAN-TASTIC VENT

TROUBLE SHOOT #9 Customer Wants to Slow the Fan Motor. INSTALLING A 10W 4 Ohm RESISTOR.


NOTE: INSTALLING A RESISTOR REDUCES LOW, MEDIUM AND HIGH SPEEDS. BY REDUCING THE FANBLADE SPEED AIR FLOW IS ALSO REDUCED. AFTER THE RESISTOR IS INSTALLED AND DEPENDING ON THE SIZE OF THE COACH, YOUR FAN-TASTIC VENT MAY NO LONGER MAINTAIN AMBIENT TEMPERATURE ON LOW, MEDIUM OR HIGH SETTINGS.

DIRECTIONS:

INSERT 10W 4 Ohm RESISTOR INTO **WHITE-GROUND-** GOING FROM MOTOR TO DOME SWITCH. **SOLDER OR USE TWO 18 GAUGE PINK BUTT CONNECTORS.**

IMPORTANT SUSPEND RESISTOR OVER FAN BLADE. THIS INSURES AIRFLOW TO COOL THE RESISTOR. DO NOT MOUNT RESISTOR DIRECTLY ONTO MOTOR MOUNT LEG!!!


18 GAUGE PINK BUTT CONNECTORS

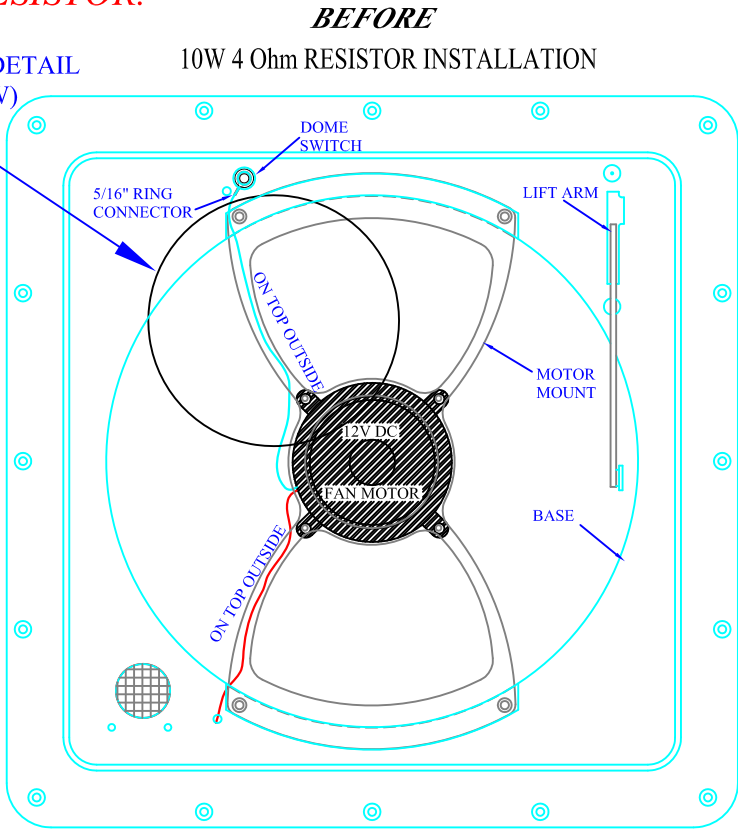


10 Watt 4 Ohm Resistor

AFTER

10W 4 Ohm RESISTOR INSTALLATION

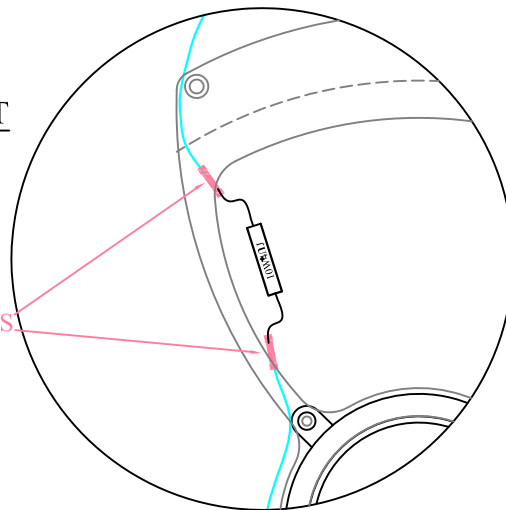

***LIKE THIS**

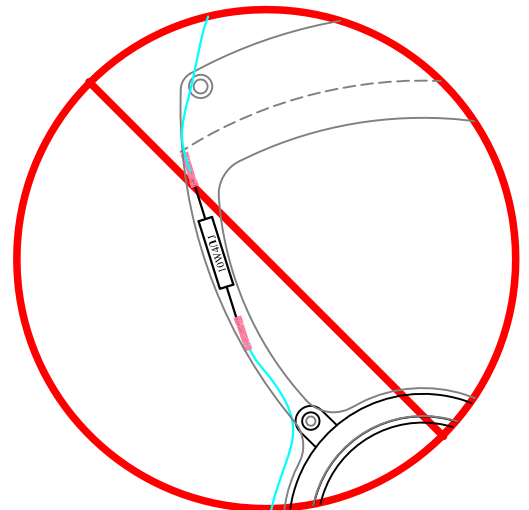

***NOT THIS**

***NOTE:** THE RESISTOR SLOWS ALL 3 SPEEDS DOWN BUT IN THE PROCESS OF DOING SO, IT GENERATES HEAT. INSTALLATION **MUST** LEAVE THE RESISTOR OFF THE MOTOR MOUNT AND IN THE AIRFLOW TO COOL.